




SCAN CODE TO
WATCH VIDEO

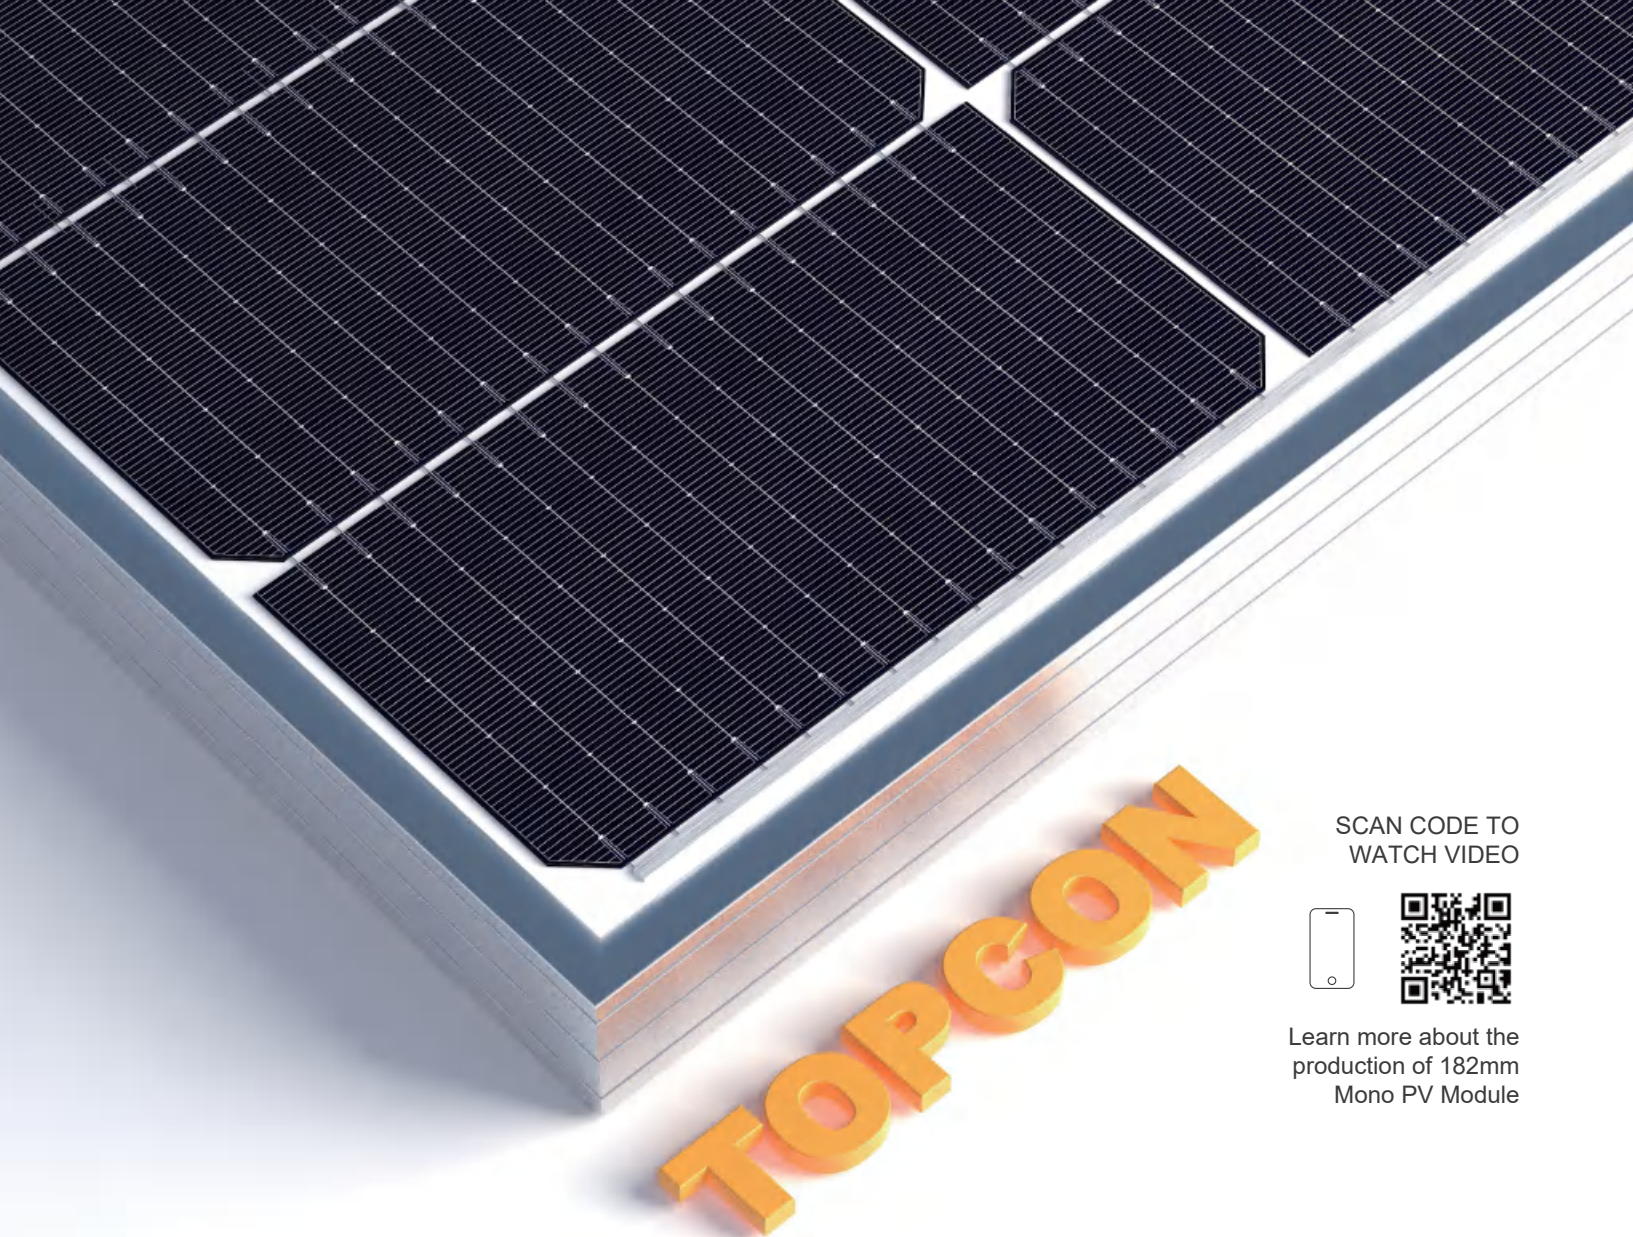


Learn more about the
production of 182mm
Mono PV Module

SKT550~585M10-144D5 550~585 Watt

182mm 16BB 144Cells Double Glass Bifacial
TOPCon Mono Half Cell PV Module Series

Sunket TOPCon Linear Warranty

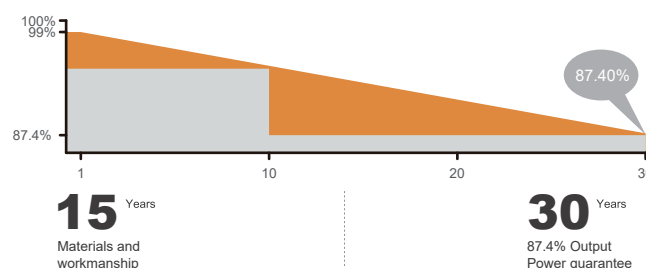

SMBB Technology
Half Cut Topcon Cell



High Energy
Performance



100% Inspection
30years Guarantee



Fire Class A




5400Pa
Strengthened
Mechanical Load




Advanced Bifacial
Efficiency



 **SUNKET[®] - Solar**

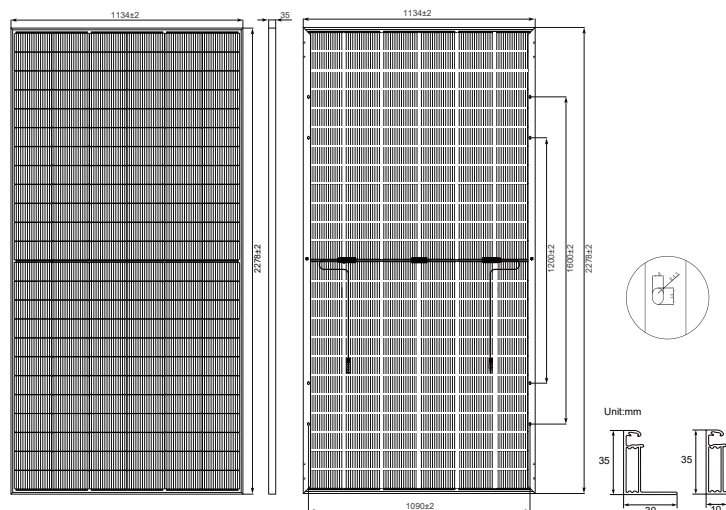

Current-Voltage & Power-Voltage Curves (SKT585M10-144D5)

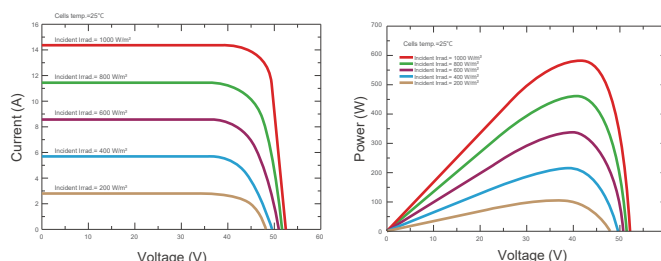

All Dimensions in mm

The above drawing is a graphical representation of the product.

For engineering quality drawings please contact SUNKET.

Electrical Characteristics (STC/NOCT)

Module Type	SKT550M10-144D5		SKT555M10-144D5		SKT560M10-144D5		SKT565M10-144D5		SKT570M10-144D5		SKT575M10-144D5		SKT580M10-144D5		SKT585M10-144D5	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power- Pmax(W)	550	412	555	416	560	421	565	425	570	429	575	432	580	436	585	440
Open Circuit Voltage - Voc(V)	50.18	47.66	50.32	47.79	50.67	48.13	50.87	48.32	51.07	48.51	51.27	48.70	51.47	48.89	51.67	49.08
Short- Circuit Current - Isc(A)	13.76	10.96	13.84	11.02	13.86	11.05	13.91	11.10	13.96	11.15	14.00	11.17	14.06	11.21	14.12	11.26
Voltage at Pmax -Vmp(V)	41.48	39.02	41.64	39.15	41.96	39.39	42.14	39.54	42.30	39.65	42.44	39.78	42.60	39.86	42.76	39.97
Current at Pmax - Imp(A)	13.26	10.56	13.33	10.63	13.35	10.69	13.41	10.75	13.48	10.82	13.55	10.86	13.62	10.94	13.69	11.01
Module Efficiency - η m(%)	21.29	/	21.48	/	21.68	/	21.87	/	22.07	/	22.26	/	22.45	/	22.64	/
Power Tolerance(W)	(0, +4.99W)															
Maximum System Voltage(V)	1500Vdc (IEC / UL)															
Maximum Series Fuse Rating (A)	30A															

STC : Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5NOCT : Irradiance 800W/m², Ambient Temperature 20°C, Air Mass1.5, Wind Speed 1m/s

Mechanical Specifications

External Dimensions	2278x1134x30mm
Weight	32kg
Solar Cells	N-Type 16BB 182mm (2x72pcs)
Front Glass	AR Coated 2+2 mm tempered glass
Frame	Anodized aluminum alloy
Junction Box	IP68
Output Cables	4.0mm ² ,1200mm (+), 1200mm (-), length can be customized
Connector	MC4 Compatible
Mechanical Load	Front Side Max. 5400Pa, Rear Side Max. 2400Pa

Temperature Characteristics

Pmax Temperature Coefficient	-0.290%/°C
Voc Temperature Coefficient	-0.250%/°C
Isc Temperature Coefficient	+0.045%/°C
Operating Temperature	-40~+85°C
Nominal Operating Cell Temperature(NOCT)	45±2°C

Bifacial Output Rear Side Power Gain

Power Gain	5%	15%	25%
Maximum Power- Pmax(W)	593.0	650.0	706.0
Open Circuit Voltage - Voc(V)	50.87	50.87	50.87
Short- Circuit Current - Isc(A)	14.66	16.06	17.44
Voltage at Pmax -Vmp(V)	42.14	42.14	42.14
Current at Pmax - Imp(A)	14.07	15.42	16.75

Packing Configuration

	2278x1134x30mm	
Container	20'GP	40'HQ
Pieces per Pallet	36	36
Pallets per Container	4	20
Pieces per Container	144	720